





Also available:



Type DA
Slip-On Tube



Type DC
Internal Pipe Thread

DB Breather Caps

Vortox Air Technology, Inc. Breather Caps are designed to be used in both negative and positive pressure atmospheres. In negative pressure, the initial media filters out any contamination in the air stream that could potentially harm internal components. When used in a positive pressure application, oil and dirt are captured in the filter media contained within the internal reservoir. As air flow stops, the oil will flow back to its source from the reservoir. The outer media serves as a secondary filter prior to the air re-entering the atmosphere oil free.


Filter Media

Standard Filter Media is a non-toxic, washable cellular foam. Alternate media of either steel or stainless steel mesh is also available.

Service Instructions

Periodically inspect for accumulation of dirt. Remove Breather Cap, wash in common detergent and rinse. Allow media to dry, then reinstall Breather Cap.

Breather Caps - DB Series: External Pipe Thread

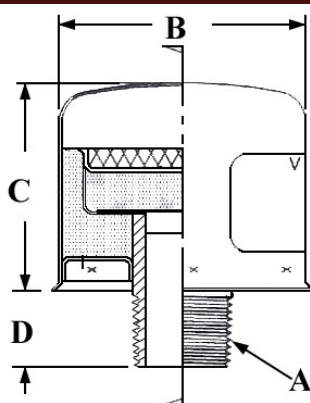

Models available in
stainless steel.

MEDIA

1. Foam
2. Woven Steel Wire
3. Stainless Steel Wire

* Not available with condensing chamber

Model No.	A (In.) NPTM	B (mm.)	C (mm.)	D (mm.)	Net Wt. KG.	Media
DB25*	¼	57.15	44.45	19.05	0.11	1
DB25A*	¼	57.15	44.45	31.75	0.11	2
DB50*	½	57.15	44.45	19.05	0.14	1
DB50B*	½	57.15	44.45	31.75	0.14	2
DB50D*	½	57.15	44.45	19.05	0.14	3
DB75*	¾	57.15	44.45	19.05	0.18	1
DB75F*	¾	57.15	44.45	19.05	0.20	2
DB100	1	82.55	69.85	25.40	0.32	1
DB100G	1	82.55	69.85	25.40	0.32	3
DB125	1¼	82.55	69.85	25.40	0.39	1
DB150	1½	82.55	69.85	25.40	0.45	1
DB200	2	128.52	87.38	25.40	0.91	1
DB200A	2	128.52	87.38	25.40	0.99	3
DB200D	2	128.52	87.38	25.40	0.91	1
DB200E	2	128.52	87.38	25.40	0.91	2
DB300	3	177.80	166.62	44.45	2.45	1
DB300A	3	177.80	166.62	44.45	2.45	2
13700	½	82.55	112.78	19.05	0.59	1



AUSTRALIAN OWNED
& OPERATED

www.vortox.com

F-3095B
250617