



VORTOX AIR TECHNOLOGY, INC.

Bottom Outlet and Elbow

Vortox Air Technology bottom outlet air cleaners are designed for application where ground clearance is critical. The 5" diameter bottom outlet is coupled to an elbow either 5"x5" or 5"x4" to provide maximum flexibility in mounting to the blower.


Vortox Air Technology Truck Blower Air Cleaners

Truck Blower Air Cleaners are available in pressure only or pressure/vacuum models. Pressure/vacuum models come with a 4" NPT aluminum camlock fitting installed. The camlock fitting can be accessed by unfastening the side rubber hooks to remove the cap and screen. All Truck Blower Air Cleaners are available in either polished T304 Stainless Steel or powder coated Electro Galvanized Carbon Steel. Two (2) mounting brackets in matching finish come standard with each air cleaner. Additionally, a washable internal foam precleaner which reduces blower noise, comes standard with each Vortox Air Technology Truck Blower Air Cleaner. Filter removal is achieved in three easy steps: removing the band clamp, lifting the top off, and removing the filter element.

We take great pride in our quality, craftsmanship, and finish, which can be seen in every air cleaner we manufacture. One look at a Vortox Air Technology air cleaner will make you forget about the others.



Integrated Cap and Screen with Bottom Outlet and Elbow

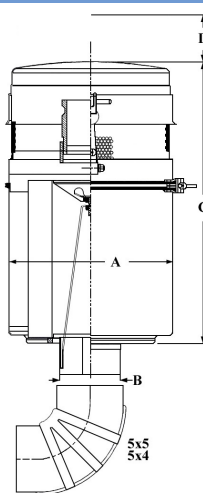

Model No.	CFM (Δ Pr) at		A (In.)	B (In.)	C (In.)	D (In.)	Element No.	Net WT. LBS
	8" H ₂ O	12" H ₂ O						
SSB-AN135AN*	615	720	13.51	5.00	23.41	3.85	VF140Z	50.00
SSB-AN135AP	800	960	13.51	5.00	23.41	3.85	VF140Z	45.00
AN135AQ*	615	720	13.51	5.00	23.41	3.85	VF140Z	54.00
AN135AR	800	960	13.51	5.00	23.41	3.85	VF140Z	46.00

* Indicates Pressure/Vacuum Use



www.vortox.com



F-3135A
03-22-19