



VORTOX AIR TECHNOLOGY, INC.

## Bottom Outlet and Elbow

Vortox Air Technology bottom outlet air cleaners are designed for application where ground clearance is critical. The 5" diameter bottom outlet is coupled to an elbow either 5"x5" or 5"x4" to provide maximum flexibility in mounting to the blower.


### Vortox Air Technology Truck Blower Air Cleaners

Truck Blower Air Cleaners are available in pressure only or pressure/vacuum models. Pressure/vacuum models come with a 4" NPT aluminum camlock fitting installed. The camlock fitting can be accessed by unfastening the side rubber hooks to remove the cap and screen. All Truck Blower Air Cleaners are available in either polished T304 Stainless Steel or powder coated Electro Galvanized Carbon Steel. Two (2) mounting brackets in matching finish come standard with each air cleaner. Additionally, a washable internal foam precleaner which reduces blower noise, comes standard with each Vortox Air Technology Truck Blower Air Cleaner. Filter removal is achieved in three easy steps: removing the band clamp, lifting the top off, and removing the filter element.

We take great pride in our quality, craftsmanship, and finish, which can be seen in every air cleaner we manufacture. One look at a Vortox Air Technology air cleaner will make you forget about the others.



## Integrated Cap and Screen with Bottom Outlet and Elbow

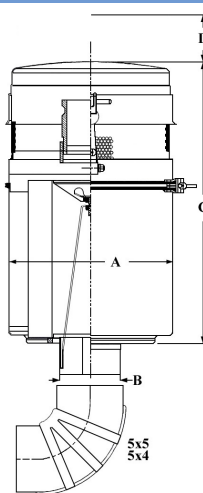

Model No.	m <sup>3</sup> /h ( $\Delta$ Pr) at		A (mm.)	B (mm.)	C (mm.)	D (mm.)	Element No.	Net WT. KG
	.002 MPa H <sub>2</sub> O	.003 MPa H <sub>2</sub> O						
SSB-AN135AN*	1044	1223	343.15	127.00	594.61	97.79	VF140Z	22.68
SSB-AN135AP	1359	1631	343.15	127.00	594.61	97.79	VF140Z	20.41
AN135AQ*	1044	1223	343.15	127.00	594.61	97.79	VF140Z	24.50
AN135AR	1359	1631	343.15	127.00	594.61	97.79	VF140Z	20.86

\* Indicates Pressure/Vacuum Use



www.vortox.com



F-3139A  
03-22-19